




Self-Propelled Scissor Lifts

GS™ -2669 RT, GS-3369 RT, GS-4069 RT

Specifications

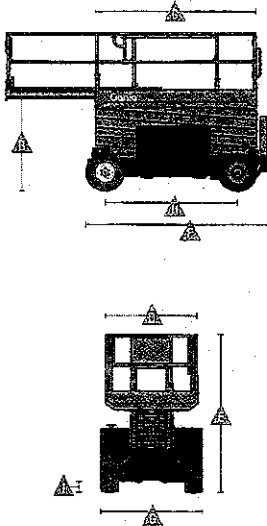

Models	GS-3369 RT	
Measurements	US	Metric
Working height maximum ¹	39 ft	11.9 m
▲ Platform height maximum	32 ft 8 in	9.96 m
▲ Platform height - stowed	4 ft 10 in	1.47 m
▲ Platform length - outside	9 ft 2 in	2.79 m
▲ Platform length - outside extended	14 ft 2 in	4.32 m
Slide-out platform extension deck	5 ft	1.52 m
▲ Platform width - outside	5 ft 3 in	1.6 m
Toeboard height	6 in	0.15 m
▲ Height - stowed ²	8 ft 6 in	2.59 m
▲ rails lowered	6 ft 3.5 in	1.92 m
▲ Length - stowed	10 ft 3 in	3.12 m
▲ platform extended	14 ft 9 in	4.5 m
▲ with outriggers	12 ft 4 in	3.76 m
▲ Width	5 ft 9 in	1.75 m
▲ Wheelbase	7 ft 6 in	2.29 m
▲ Ground clearance - center	9.5 in	0.24 m

Productivity

Maximum platform occupancy	4	
Lift capacity	1,000 lbs	454 kg
Extension deck capacity	300 lbs	136 kg
Drive height	full height	
Drive speed - stowed	3.5 mph	5.6 km/h
Drive speed - raised	0.3 mph	0.5 km/h
Gradeability - stowed ³	35%	
Maximum outrigger leveling:		
front/back uphill		
side to side		
Turning radius - inside	83 in	2.11 m
Turning radius - outside	181.2 in	4.6 m
Raise/lower speed	39 / 29 sec	
Controls		
Drive		
Tires - rough terrain	12 x 26 in	30 x 66 cm

Power

Power source	24.8 hp	
Fuel tank capacity	10 gal	37.9 L
Hydraulic system capacity	18 gal	68.1 L

Weight⁴ / Floor Loading⁵

Weight - ANSI, CSA	7,895 lbs	3,490 kg
- with outriggers	8,560 lbs	3,882 kg
Tire load, maximum	3,058 lb	1,387 kg
Tire contact pressure	76.1 psf	524 kPa
Occupied floor pressure	172 psf	8.22 kPa

Standards Compliance ANSI A92.6, CSA B354.2, CE Compliance, AS 1418.10

¹ The metric equivalent of working height adds 2 m to platform height. U.S. adds 6 ft to platform height.
² Based on RT tires; deduct 2 in (5.8 cm) for turf and non-marking tires.
³ Gradeability applies to driving on slopes. Gradeability may vary depending on the weight of options installed on machine. See operator's manual for details regarding slope ratings.
⁴ Weight varies depending on options and country standards.
⁵ Note: Floor loading information is approximate and does not incorporate different option configurations. It should be used only with adequate safety factors.